


Installation positions

It should be installed close to the edge of the textile and the installation position should not be folded as shown in below picture)

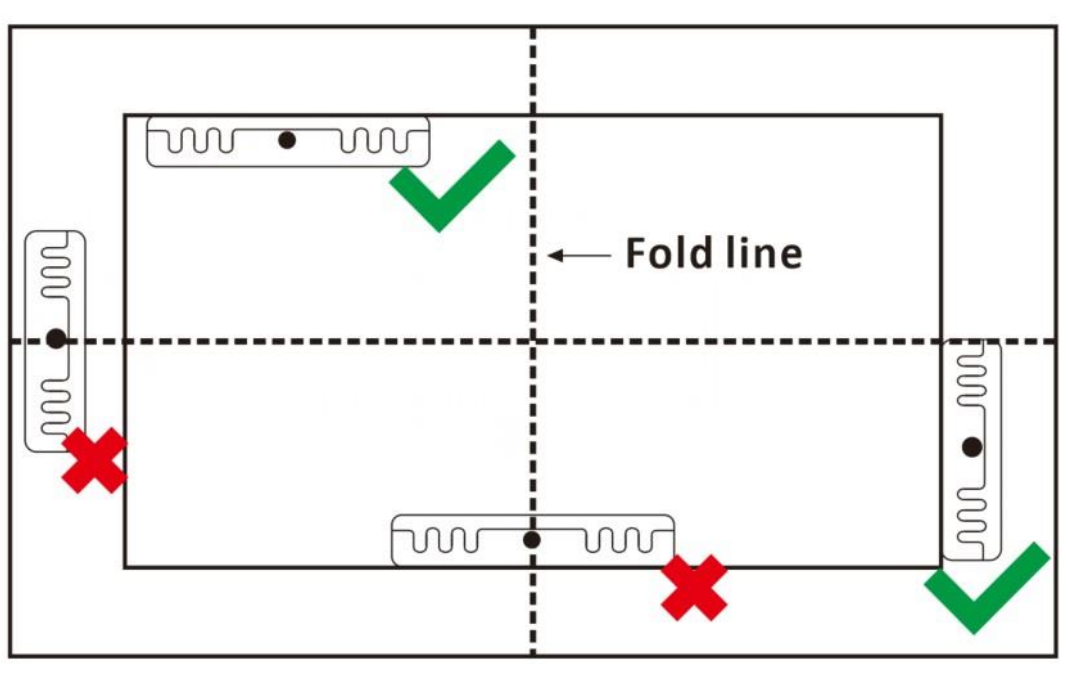

Installation method

1. Sewing two ends (as shown in picture below), even pricking on the two ends antenna a little bit is ok, do not effect the tag function.



2. Sewing three sides without pricking the metal antenna of horizontal long side (as shown in picture below)



3. Sewing the two long sides without pricking the metal antenna (as picture below). There is about 1.5mm area is for sewing on the two sides.

